

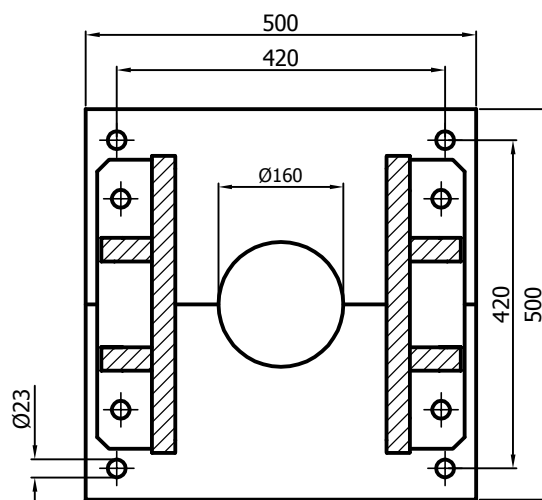


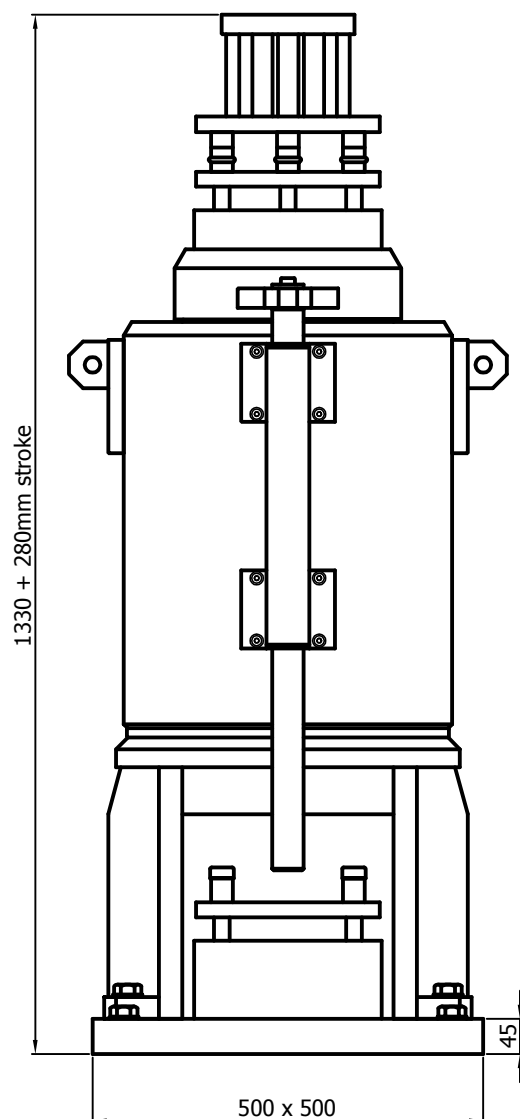

# Strandjack **H-200**

## Technical Data

|                        |                       |
|------------------------|-----------------------|
| Capacity:              | 2000 kN               |
| Piston stroke:         | 280 mm                |
| Area "Pressureline":   | 593.8 cm <sup>2</sup> |
| Area "Returnline":     | 335.4 cm <sup>2</sup> |
| Qty of strands:        | 19 pieces             |
| Height without stroke: | 1330 mm               |
| Base plate:            | 500 x 500 mm          |
| Attachment:            | 4 pieces M20          |
| Weight:                | 770 kg                |


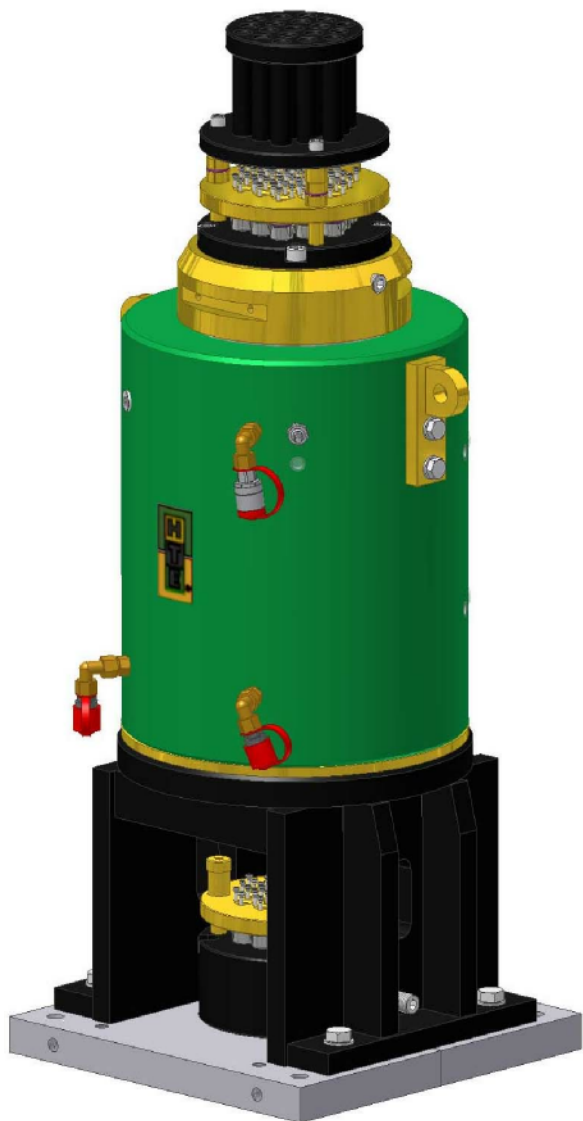




## Endanchorage **EV-19**

### Technical Data

|                  |           |
|------------------|-----------|
| Capacity:        | 2000 kN   |
| Qty of strands:  | 19 pieces |
| Dimension d x h: | 200 x 95  |
| Bundlediameter:  | 160 mm    |
| Total height:    | 150 mm    |
| Weight:          | 24 kg     |

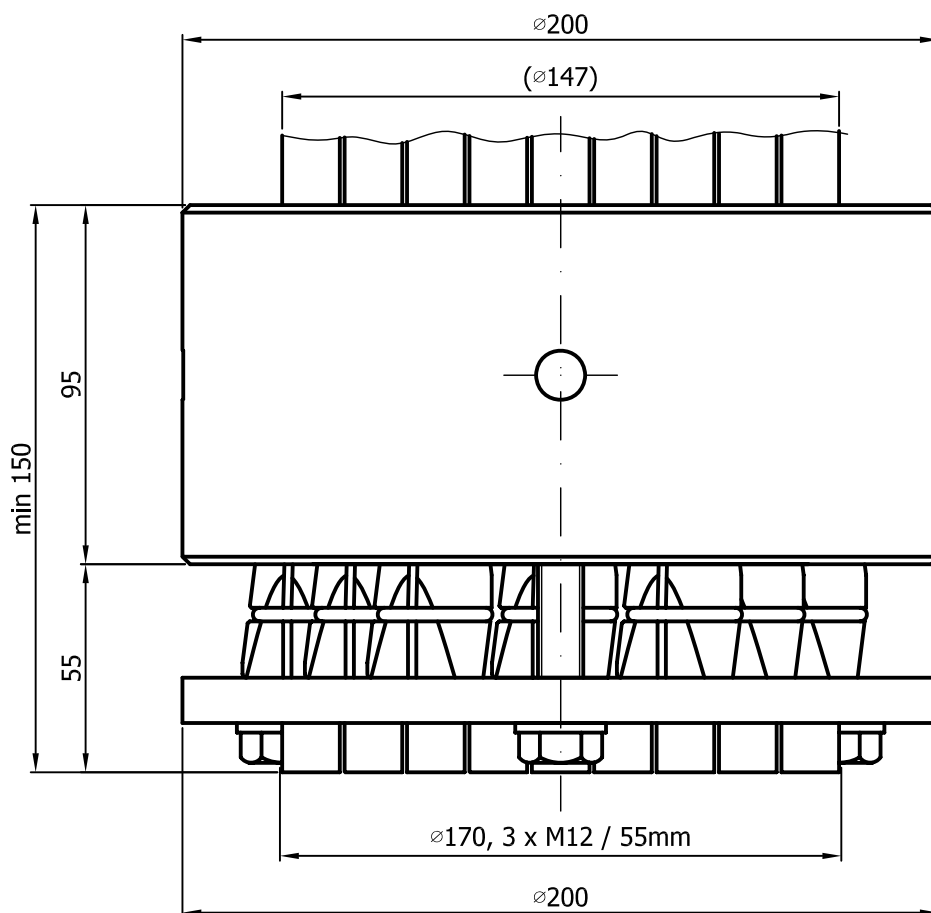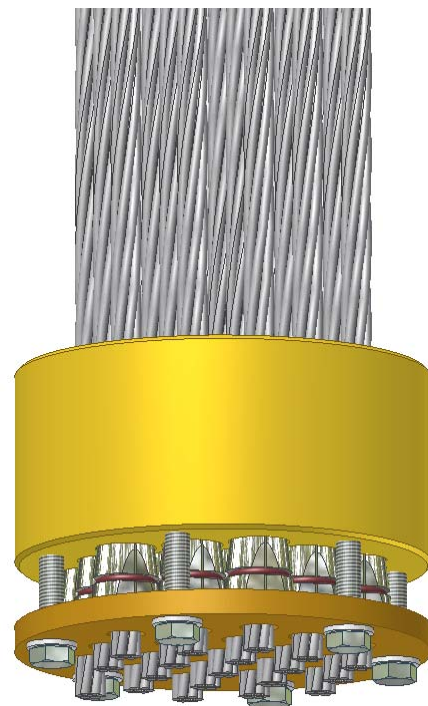




# Druck - Kraft - Diagramm **H-200**

## Technische Daten

Kolbenfläche: 593.8 cm<sup>2</sup>

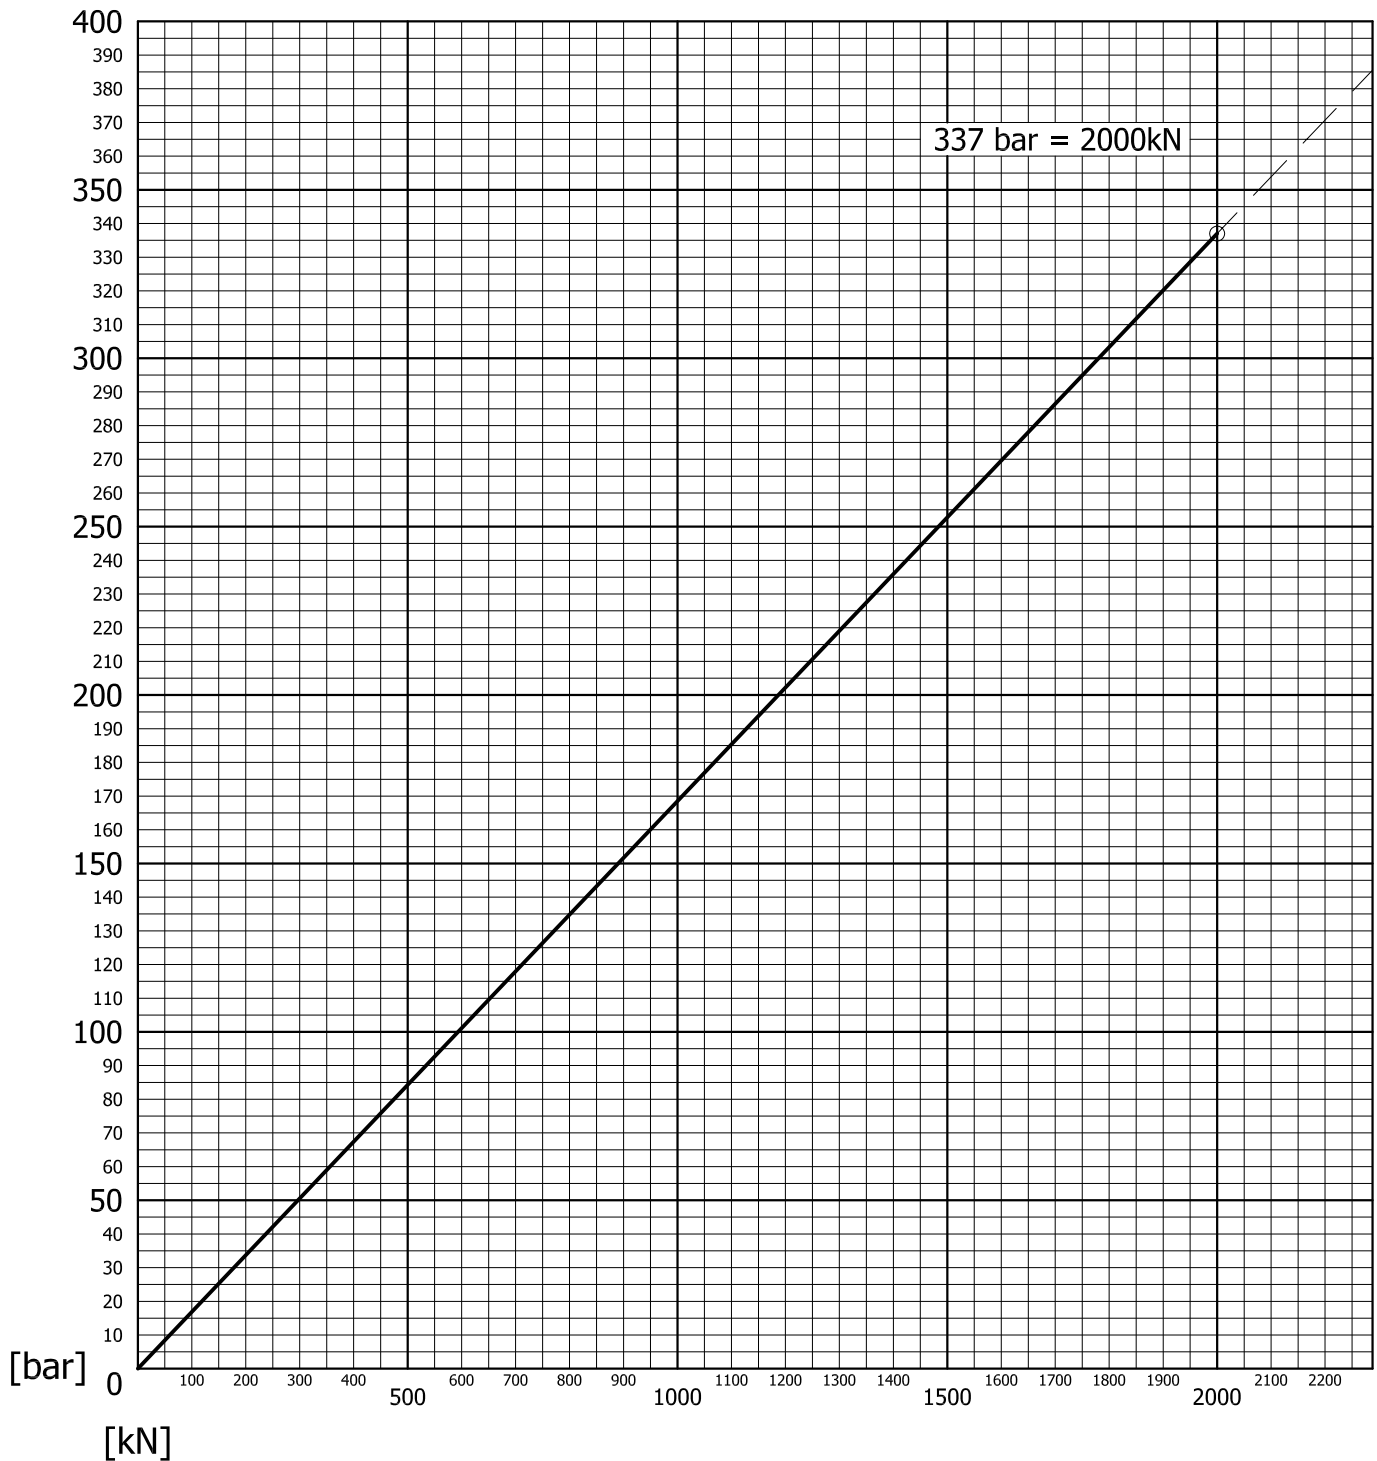



# Connecting piece **CP-200**

## Technical Data

|                        |                 |
|------------------------|-----------------|
| Capacity:              | 2000 kN         |
| Dimension l x w x h:   | 431 x 300 x 800 |
| Bolt diameter:         | 140 mm          |
| Hole for bolt:         | 141 mm          |
| Stand bundle diameter: | 160 mm          |
| Weight:                | 250 kg          |

